

USB TERMINAL ADAPTER



ISDN-USB/N

- ❖ MULTILINK PPP FOR 128Kbps FAST INTERNET ACCESS
 - ❖ FULLY COMPLIANT WITH USB SPECIFICATION 1.0
 - ❖ GIII 14400bps SEND & RECEIVE FAX
 - ❖ V.32bis 14400bps FULL DUPLEX MODEM
-

Features


- Multilink PPP combines two B-channels into a single 128Kbps channel for fast INTERNET access
- USB Specification 1.0
- Plug and Play
- Multiple Subscriber Number
- Run FAX CLASS1 compatible software package
- Run Hayes compatible software package
- CAPI compatible
- Speed : ISDN- 64000 or 128000bps, Fax-14400bps, Modem-14400bps
- Four LED indicators monitor the status of ISDN line and USB cable

USB TERMINAL ADAPTER

Specifications

ISDN interface <ul style="list-style-type: none">• S/T interface• ITU-T I.430	Command set <ul style="list-style-type: none">• Fax Class1 command set, AT command set,• Windows compatible, CAPI compatible
ISDN standards <ul style="list-style-type: none">• ETSI Euro ISDN (Net 3)• Japan NTT INS net 64• US National ISDN-1	Diagnostic facility <ul style="list-style-type: none">• Self call with data loop back test
B channel protocol <ul style="list-style-type: none">• Multilink PPP/128K bps• PPP asynchronous-to-synchronous HDLC transparent• Fax GIII ITU-T V.17/ V.29/ V27ter/ V.21 channel2• Modem ITU-T V.32bis/ V.32/ V.22bis / V.22 with V.42 error correction	Line requirements <ul style="list-style-type: none">• ISDN Basic Rate line (Order from your telephone company)
Computer interface <ul style="list-style-type: none">• USB connector (Specification 1.0)	Temperature <ul style="list-style-type: none">• 32~122°F (0 ~50°C)
Monitor <ul style="list-style-type: none">• Four LED indicators	Humidity <ul style="list-style-type: none">• Max. 95% (Non-Condensing)
	Regulatory Approvals <ul style="list-style-type: none">• FCC, CE

Application:

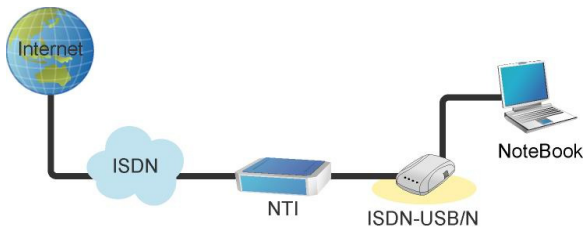

FCC CE

ACEEX

2F, NO.2, ALLEY 1, SZE-WEI LANE, CHUNG-CHENG RD., HSINTIEN, TAIPEI 23138, TAIWAN, R.O.C.

TEL: 886-2-22185357 FAX: 886-2-22186329
http://www.aceex.com Mail: sales@aceex.com