

External ISDN Terminal Adapter



ISDN-TA/MLP/2B

- ❖ Multilink PPP for 128Kbps fast INTERNET access
- ❖ PPP/V.120/V.110/X.75 protocol for INTERNET service
- ❖ With 2 analog ports for analog telephone

Features


- CAPI compatible (G3 fax and soft modem provided)
- AT COMMAND SET
- Data speed : 64000 / 128000 bps
- Auto-dial & Auto-answer
- Plug and Play
- ITU-T V.110 - for rate adaption (option)
- ITU-T V.120 - for Compuserve or others INTERNET service provider
- PPP asynchronous to synchronous HDLC conversion - for main INTERNET service provider
- Multilink PPP combines the two 64Kbps B-channels of an ISDN BRI line into a single 128Kbps channel
- Inter Com call between two analog ports
- Call waiting, call hold, call record, caller ID
- Individual phone number (MSN) for each analog port
- Caller ID on analog port
- Two POTS for analog devices
- Setup Utility for Windows environment
- Run all Hayes compatible software packages
- ITU-T X.75 transparent
- Non-volatile RAM to store configuration profile
- FLASH download software
- Multiple Subscriber Number

External ISDN Terminal Adapter

Specifications

ISDN interface <ul style="list-style-type: none">• S/T interface• ITU-T I.430	Data rates <ul style="list-style-type: none">• 230400 to 1200 asynchronous
ISDN standards <ul style="list-style-type: none">• ETSI Euro ISDN (Net 3)• Japan NTT INS net 64• US National ISDN-1	Power <ul style="list-style-type: none">• 12V AC, 830mA
B channel protocol <ul style="list-style-type: none">• Multilink PPP/128k bps• PPP asynchronous-to-synchronous HDLC transparent• ITU-T V.120 rate adaption• ITU-T V.110 rate adaption (option)• ITU-T X.75 transparent• BACP and BOD	Extra memory <ul style="list-style-type: none">• Modifiable non-volatile memory stores:• One configuration profile• FLASH memory for firmware upgrade
Computer interface <ul style="list-style-type: none">• ITU-T V.24/EIA-232E/DB25 connector	Line requirements <ul style="list-style-type: none">• ISDN Basic Rate line (Order from your telephone company)
Command set <ul style="list-style-type: none">• AT command set. Windows / Macintosh compatible• CAPI compatible	Analog interface <ul style="list-style-type: none">• 2 Ringing POTS ports for voice/data call support
	Temperature <ul style="list-style-type: none">• 32~122°F (0 ~50°C)
	Humidity <ul style="list-style-type: none">• Max. 95% (Non-Condensing)
	Regulatory Approvals <ul style="list-style-type: none">• FCC, CE

Application:

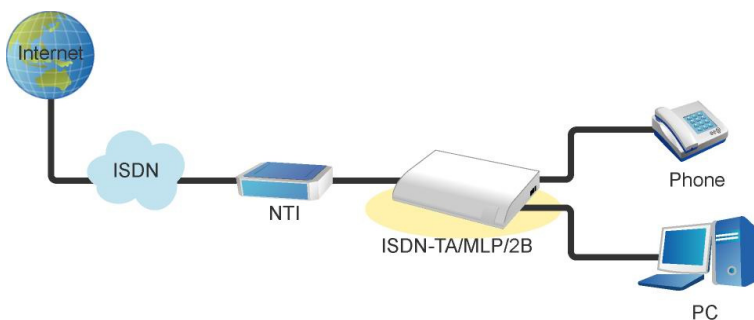

FCC CE

ACEEX

2F, NO.2, ALLEY 1, SZE-WEI LANE, CHUNG-CHENG RD., HSINTIEN, TAIPEI 23138, TAIWAN, R.O.C.

TEL: 886-2-22185357 FAX: 886-2-22186329
http://www.aceex.com Mail: sales@aceex.com