

Powerline Ethernet Bridge



PLB/N2

Features


- No need new wires, use the home's existing Powerline
- Be cost competitive
- Easy to install
- Fully compliant with IEEE 802.3 / 802.3u
- Supports DES encryption for Powerline network
- Supports data rates up to 14Mbps for Powerline networks
- Allow user to connect PCs and other devices conveniently, at any power outlet at home

Powerline Ethernet Bridge

Specifications

Standard <ul style="list-style-type: none">IEEE 802.3 / 802.3u, HomePlug 1.0	Data Rate <ul style="list-style-type: none">Up to 14 Mbps
Port <ul style="list-style-type: none">10/100 Mbps Ethernet, RJ45	Led indicator <ul style="list-style-type: none">3 LEDs for link, activity
Security <ul style="list-style-type: none">56 bits DES encryption	Temperature <ul style="list-style-type: none">Storage Temperature: -20°C~70°COperating Temperature: 0°C ~40°C
Modulation <ul style="list-style-type: none">OFDM, DQPSK, DBPSK, ROBO Carrier Modulation Support	Humidity <ul style="list-style-type: none">Storage Humidity: 5%~95% R/H (max).Operating Humidity: 10%~90% R/H (max)
Frequency Band <ul style="list-style-type: none">4.3 Mhz to 20.9 Mhz	Regulatory Approvals <ul style="list-style-type: none">FCC, CE, LVD

Application:

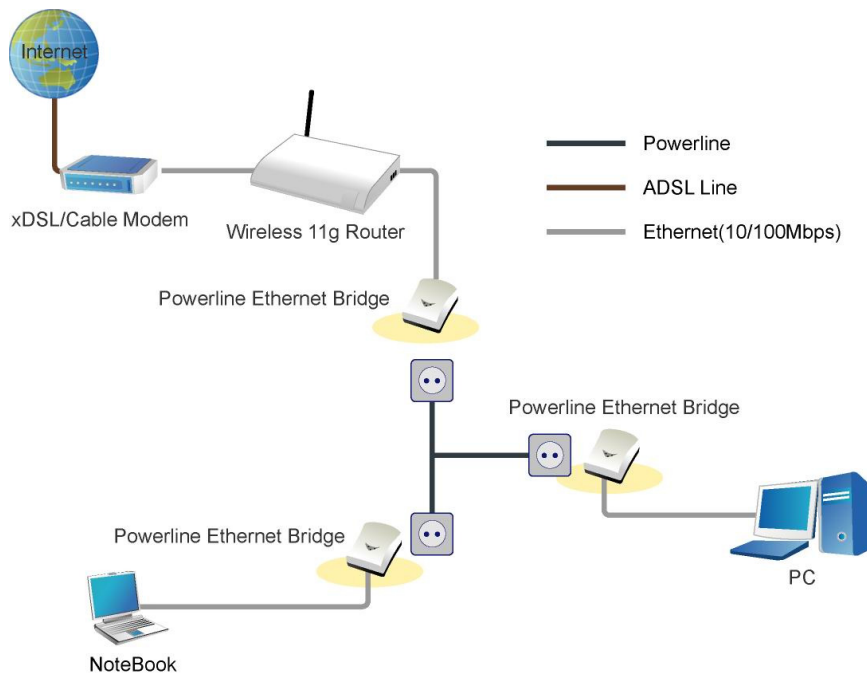

FCC CE

ACEEX

2F, NO.2, ALLEY 1, SZE-WEI LANE, CHUNG-CHENG RD., HSINTIEN, TAIPEI 23138, TAIWAN, R.O.C.

TEL: 886-2-22185357 FAX: 886-2-22186329
http://www.aceex.com Mail: sales@aceex.com