

# Wireless MIMO Router



**MR/P**

❖ Superior Wireless Coverage and Reliability

---

## **Features**

- Configuration and management operated via WWW browser with password protected access
- Enhance Wireless coverage with MIMO technology
- Supports MIMO Wireless, Compatibility with IEEE 802.11g and 802.11b (2.4GHz) standards
- Up to 54Mbps data rate for wireless networks
- Supports 64/128-bit WEP, WPA (TKIP with IEEE 802.1x), WPA2 (AES with IEEE 802.1x) functions for high level of security
- All Ethernet ports support auto-crossover (MDI/MDI-X) - No need for crossover cables
- Compliant with IEEE 802.3 and IEEE 802.3u 10/100 Mbps
- DMZ and Virtual Server function
- WAN and LAN side connection statistics
- Provided operating modes include routing, bridge, static IP, PPPoE etc
- Firmware upgraded via HTTP

# Wireless MIMO Router

## Specifications

<b>Wireless Features</b> <ul style="list-style-type: none"><li>• Support IEEE 802.11g, 802.11b and MIMO XR™ Wireless Access Point</li><li>• Support 128-Bit and 64-Bit WEP encryption, WPA-PSK, WPA2-PSK, 802.1x</li><li>• Transmit Power: 18dBm ± 2dBm</li></ul>
<b>Modulation Types Supported</b> <ul style="list-style-type: none"><li>• OFDM: BPSK, QPSK, 16QAM, 64QAM, Proprietary MIMO modulation (11g)</li><li>• DSSS: DBPSK, DQPSK, CCK(11b)</li></ul>
<b>Data Rates Supported</b> <ul style="list-style-type: none"><li>• IEEE 802.11b: 1, 2, 5.5 and 11 Mbps</li><li>• IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li></ul>
<b>Quality of Service (QoS)</b> <ul style="list-style-type: none"><li>• IEEE 802.11e QoS</li><li>• Wi-Fi Alliance WMM (Wi-Fi Multimedia Enhancement) support</li></ul>
<b>Management Features</b> <ul style="list-style-type: none"><li>• Firmware upgrade via HTTP</li><li>• WAN and LAN side connection statistics</li><li>• Configuration of static routes and routing table</li><li>• Configuration of NAT / NAPT</li><li>• Password protected access</li><li>• Selection of Bridge or Router Mode</li><li>• PPP user ID and password</li></ul>
<b>Physical Interfaces</b> <ul style="list-style-type: none"><li>• 4 * RJ-45 10/100Mbps LAN Ports</li><li>• 1* RJ-45 WAN Port</li><li>• 1 Power Jack</li><li>• WAN Status, Power and switching hub LED indicators</li></ul>
<b>Router Features</b> <ul style="list-style-type: none"><li>• DHCP Server and Client</li><li>• NAPT (Network Address and Port Translation)</li><li>• NAT (Network Address Translation)</li><li>• ICMP (Internet Control Message Protocol)</li><li>• IGMP (Internet Group Management Protocol)</li><li>• DDNS (Dynamic Domain Name Service)</li></ul>
<b>Security Features</b> <ul style="list-style-type: none"><li>• Password protected configuration access</li><li>• User authentication (PAP / CHAP) with PPP</li></ul>
<b>Ethernet Features</b> <ul style="list-style-type: none"><li>• Compliant with IEEE 802.3 and 802.3u 10/100 Mbps</li><li>• All Ethernet ports support auto-crossover (MDI/MDI-X)</li></ul>

**Temperature**

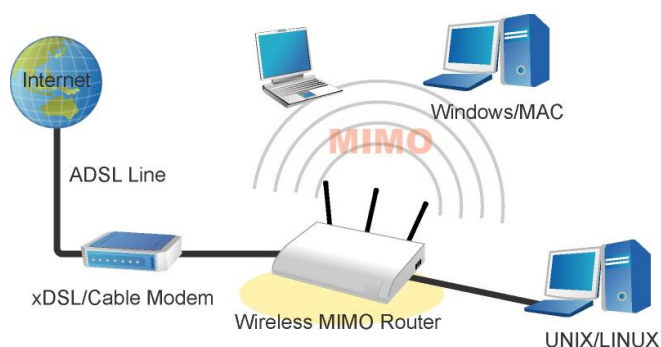
- 32~122°F (0 ~50°C)

**Humidity**

- Max. 95% (Non-Condensing)

**Regulatory Approvals**

- FCC, CE

**Application:****FCC CE****ACEEX**

2F, NO.2, ALLEY 1, SZE-WEI LANE, CHUNG-CHENG RD., HSINTIEN, TAIPEI 23138, TAIWAN, R.O.C.

TEL: 886-2-22185357 FAX: 886-2-22186329  
http://www.aceex.com Mail: sales@aceex.com